


Bravoled 2x4' LED Panel Light, 38 watt 4180 & 4750 Lumen, UL/cUL, DLC

Specifications


Model#	BL-P7-38W-XXXX
Description	2x4' LED Panel Light
Power	38W
Lumen Efficiency	110lm/w & 125lm/w
Voltage Input	100-277Vac
Lumen output	4180lm & 4750lm
Color Temperature	3000K, 4000K, 5000K
CRI	Ra>80
LED Chips	SMD 2835
Power Factor	>0.9
Lens	Frosted
Operating Temp.	-25 C ~ 55 C
Certificates	UL/cUL(E359062), DLC
warranty	5 years
L70 life span	>50000Hrs
Frame	Aluminum
Max.Input current	0.5A
Dimmable	Yes(0-10V)
Weight	11 Kg (24 lbs)

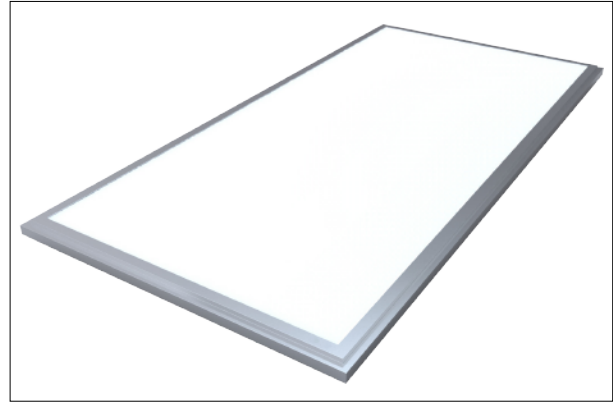

Order Information


Item Number	Description	Power	Voltage Input	Dimmable	CCT	Lumen Output	Certificates
BL-P7-38W-XXXX	2x4' LED Panel Light	38W	100-277Vac	Yes	3000K 4000K 5000k	4180lm 4750lm	UL/cUL, DLC

Lux Chart

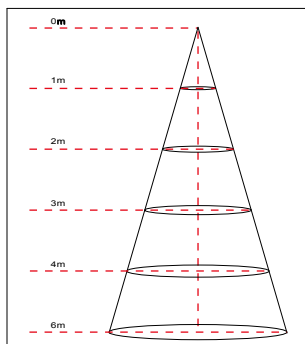

Height	Average Lux (lx)	Light range (dia.)
1M	1345.6	293.9cm
2M	336.4	587.8cm
3M	149.5	881.6cm
4M	84.1	1175.5cm
6M	37.4	1763.3cm

Photometrics



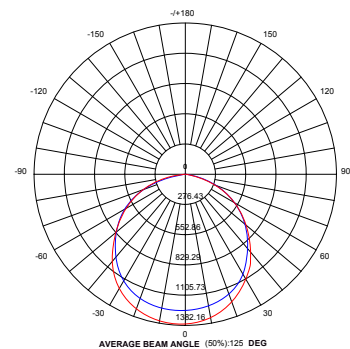











Bravoled 2x4' LED Panel Light, 38 watt 4180 & 4750 Lumen, UL/cUL, DLC

Installation








Wall Mount

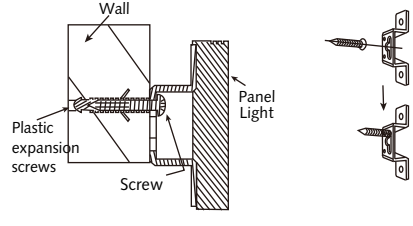 <p>1. Nailing two plastic expansion screws and other screws into the wall according to the size shown in the illustration</p>	 <p>2. Hanging the panel on the finished screws</p>	 <p>3. This is the combining drawing for wall and panel, please make the installation according to the installation drawing.</p>	 <p>4. Installation finished</p>
---	--	--	---

Recessed Mount



 <p>1.</p>	 <p>2.</p>	 <p>3.</p>	 <p>4.</p>
 <p>5.</p>	 <p>6.</p>		

Suspension


 <p>sleeve anchor bolt</p>	 <p>Steel wire</p>	 <p>Steel wire adjustable holder</p>	<p>1. Put the ball end of the steel wire through the hole of the mount bracket of panel</p> 	<p>2. Put the other end of the steel wire through the wire holder, and adjust the length of the steel wire.</p>  <p>Push to adjust length of wire</p>
<p>3. mount the sleeve anchor bolt into ceiling</p> 	<p>4. hang the 4 wire holders to the sleeve anchor bolt</p> 			

Bravoled 2x4' LED Panel Light, 38 watt 4180 & 4750 Lumen, UL/cUL, DLC

Ceiling Mount

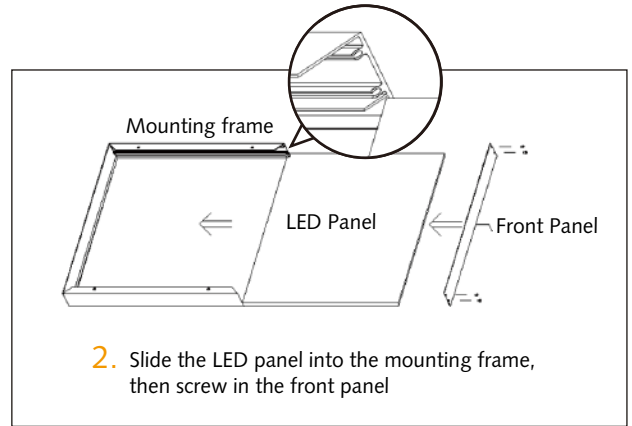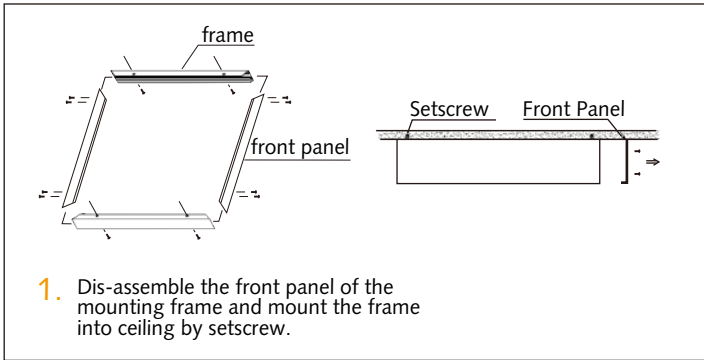


Dimension/Weight

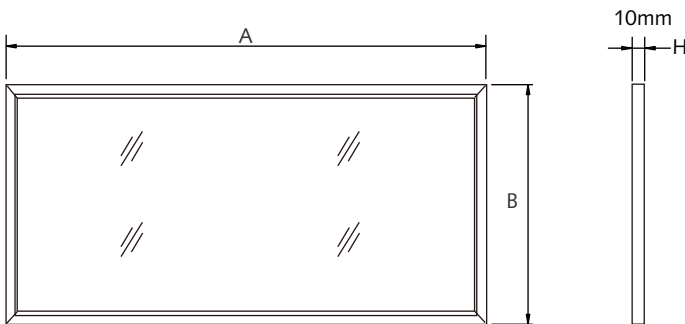


Size	Dimension (A x B mm)	Weight
2X4'	1210x603	11kg (24 lbs)

Wiring Diagram (0-10V Dimmable Panel)

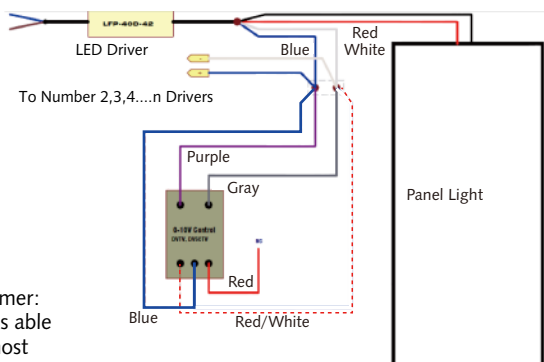

Dimmer Recommended
Lutron LED 0~10V dimmer:
DVTV, DVSCTV which is able
to be purchased from most
of electricity stores

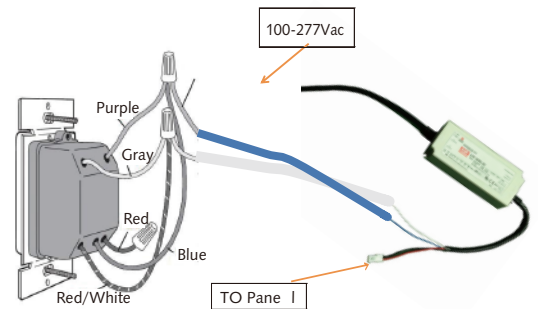





Bravoled 2x4' LED Panel Light, 38 watt 4180 & 4750 Lumen, UL/cUL, DLC

Packaging


2pcs/CTN G.W.:19 kgs Dimension: 50.2"L x 25.8"W x 4.5"H (1275mm x 655mm x 115mm)

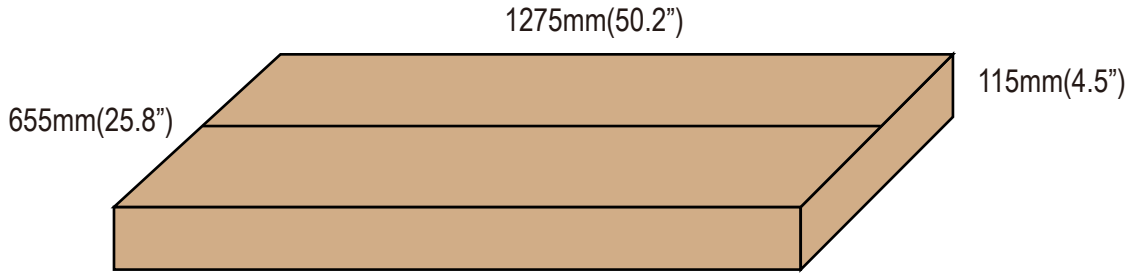


Container Loading QTY

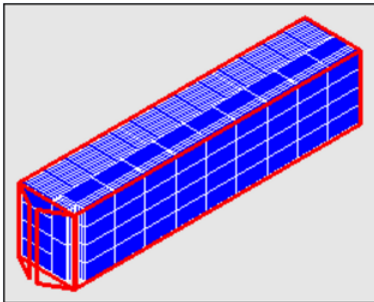

Size	Corton QTY	Product QTY	Volumn	G.W.
40'hq	693 ctn	1386 pcs	74.02m ³	13167kgs

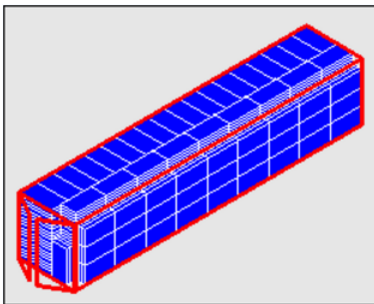

Size	Corton QTY	Product QTY	Volumn	G.W.
40'gp	597 ctn	1194 pcs	63.77 m ³	11343 kgs

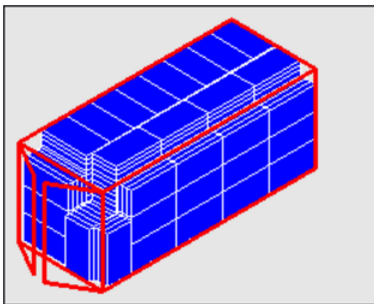

Size	Corton QTY	Product QTY	Volumn	G.W.
20'gp	285 ctn	570 pcs	30.44m ³	5415kgs



LM79
LM80

