


Bravoled 2x4' LED Panel Light, 60 watt 6600 & 7500 Lumen, UL/cUL, DLC

## Specifications


Model#	BL-P7-60W-XXXX
Description	2x4' LED Panel Light
Power	60W
Lumen Efficiency	110lm/w & 125lm/w
Voltage Input	100-277Vac
Lumen output	6600lm & 7500lm
Color Temperature	3000K, 4000K, 5000K
CRI	Ra>80
LED Chips	SMD 2835
Power Factor	>0.9
Lens	Frosted
Operating Temp.	-25 C ~ 55 C
Certificates	UL/cUL(E359062), DLC
warranty	5 years
L70 life span	>50000Hrs
Frame	Aluminum
Max.Input current	0.5A
Dimmable	Yes(0-10V)
Weight	11 Kg (24 lbs)

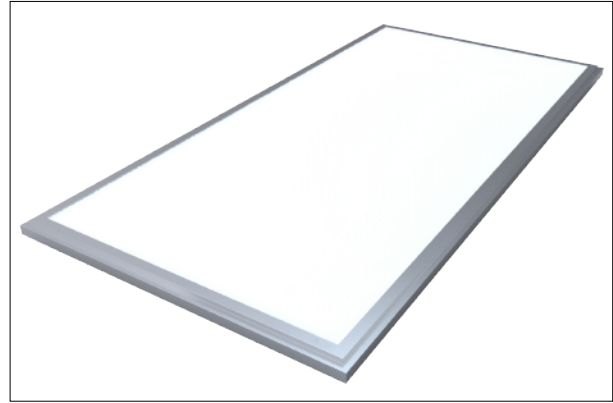

## Order Information


Item Number	Description	Power	Voltage Input	Dimmable	CCT	Lumen Output	Certificates
BL-P7-60W-XXXX	2x4' LED Panel Light	60W	100-277Vac	Yes	3000K 4000K 5000k	6600lm 7500lm	UL/cUL, DLC

## Lux Chart

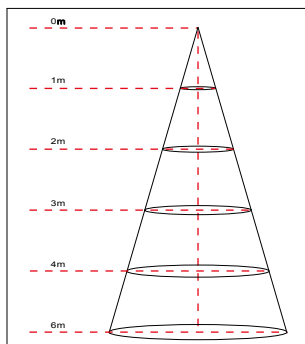

Height	Average Lux (lx)	Light range (dia.)
1M	2161.6	306.3cm
2M	540.4	612.5cm
3M	240.2	918.7cm
4M	135.1	1225.0cm
6M	60.0	1837.5cm

## Photometrics



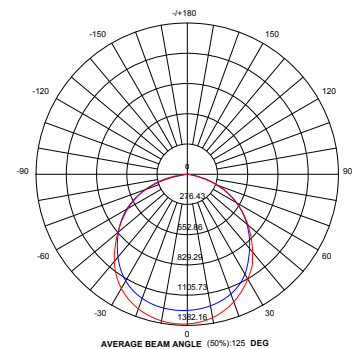





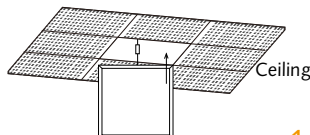
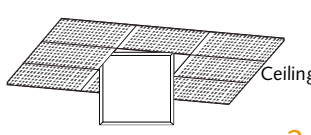
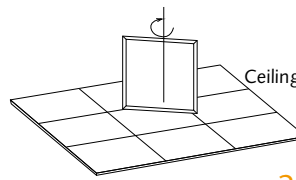
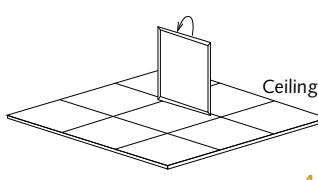
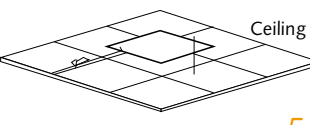
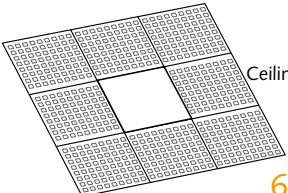
Bravoled 2x4' LED Panel Light, 60 watt 6600 & 7500 Lumen, UL/cUL, DLC

## Installation




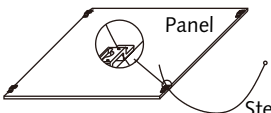



### Wall Mount

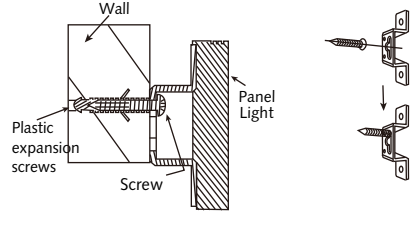 <p>1. Nailing two plastic expansion screws and other screws into the wall according to the size shown in the illustration</p>	 <p>2. Hanging the panel on the finished screws</p>	 <p>3. This is the combining drawing for wall and panel, please make the installation according to the installation drawing.</p>	 <p>4. Installation finished</p>
---	--	--	---

### Recessed Mount

 <p>1.</p>	 <p>2.</p>	 <p>3.</p>	 <p>4.</p>
 <p>5.</p>	 <p>6.</p>		

### Suspension

 <p>sleeve anchor bolt</p>	 <p>Steel wire</p>	 <p>Steel wire adjustable holder</p>	<p>1. Put the ball end of the steel wire through the hole of the mount bracket of panel</p> 	<p>2. Put the other end of the steel wire through the wire holder, and adjust the length of the steel wire.</p>  <p>Push to adjust length of wire</p>
<p>3. mount the sleeve anchor bolt into ceiling</p> 	<p>4. hang the 4 wire holders to the sleeve anchor bolt</p> 			





LM79  
LM80




Bravoled 2x4' LED Panel Light, 60 watt 6600 & 7500 Lumen, UL/cUL, DLC

## Ceiling Mount

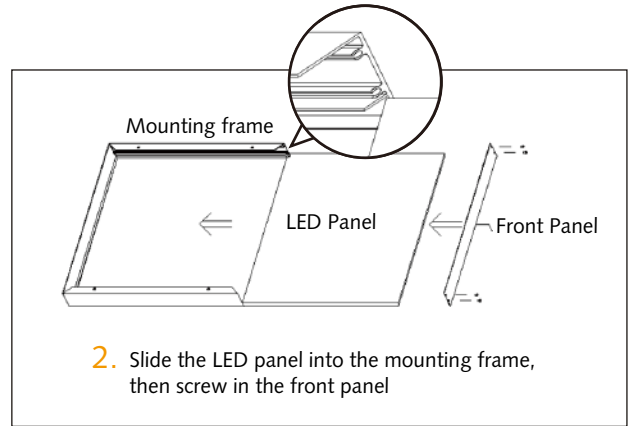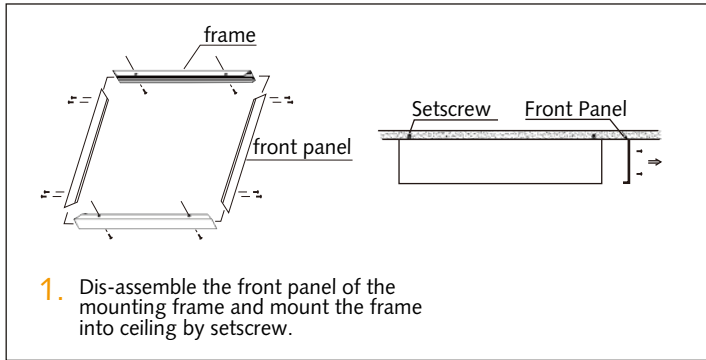


## Dimension/Weight

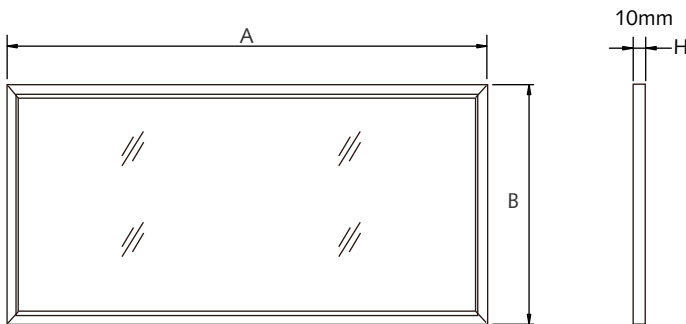


Size	Dimension (A x B mm)	Weight
2X4'	1210x603	11kg (24 lbs)

## Wiring Diagram (0-10V Dimmable Panel)

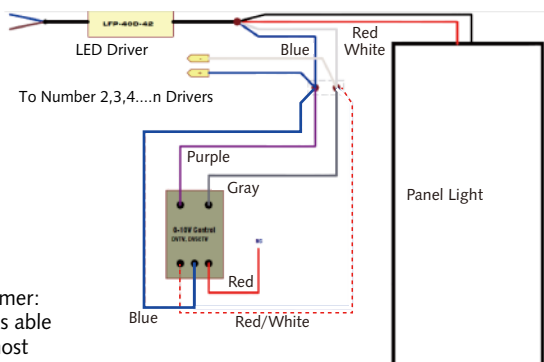

Dimmer Recommended  
Lutron LED 0~10V dimmer:  
DVTV, DVSVCTV which is able  
to be purchased from most  
of electricity stores

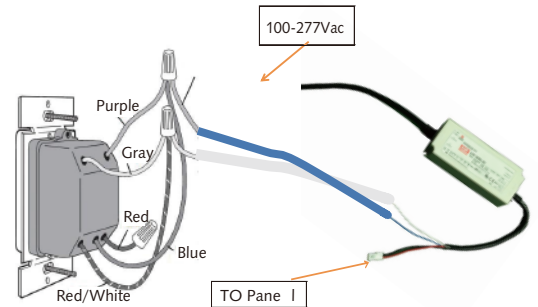





Bravoled 2x4' LED Panel Light, 60 watt 6600 & 7500 Lumen, UL/cUL, DLC

## Packaging


2pcs/CTN G.W.:19 kgs Dimension: 50.2"L x 25.8"W x 4.5"H (1275mm x 655mm x 115mm)

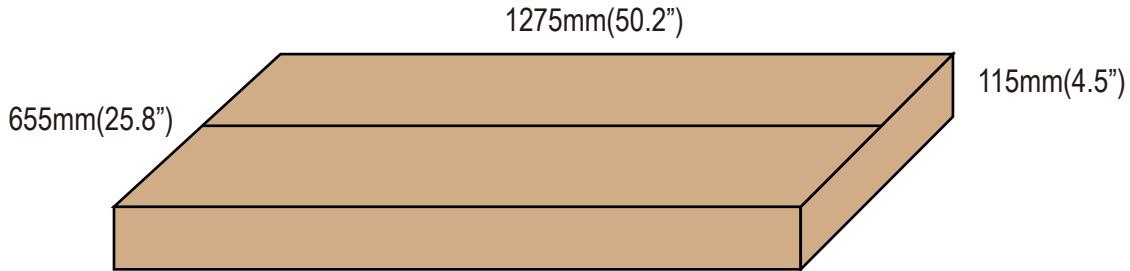


## Container Loading QTY

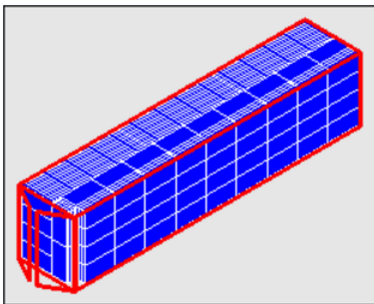

Size	Corton QTY	Product QTY	Volumn	G.W.
40'hq	693 ctn	1386 pcs	74.02m <sup>3</sup>	13167kgs

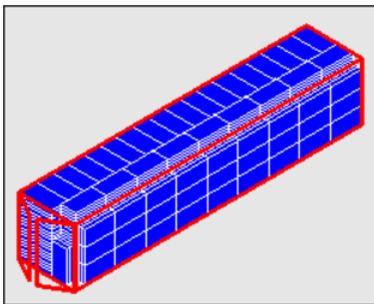

Size	Corton QTY	Product QTY	Volumn	G.W.
40'gp	597 ctn	1194 pcs	63.77 m <sup>3</sup>	11343 kgs

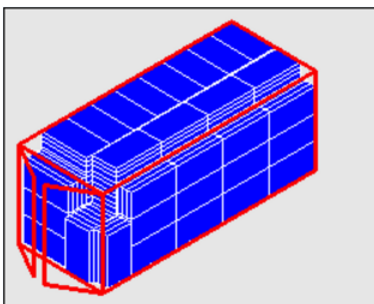

Size	Corton QTY	Product QTY	Volumn	G.W.
20'gp	285 ctn	570 pcs	30.44m <sup>3</sup>	5415kgs



LM79  
LM80

