



Bravoled 2x4Ft LED Troffer Retrofit Kit, 52Watt 5460lm & 6500lm

## Specifications


Model#	BL-TRF-24-52W-XTTD
Description	2x4Ft LED Troffer Retrofit Kit
Power	52W
Voltage Input	AC120~277V 50~60HZ
Efficacy	105 Lm/w & 125 Lm/w
Lumen output	5460lm & 6500lm
CRI	Ra>80
Housing Finish	Steel base with white powder coating
Application	Indoor Only
Lens	Frosted diffuse PC lens
Operating Temp.	-20 °C ~ 55 °C
IP Rating	IP20
Certificates	ETL/cETL(file# 4007551), DLC
warranty	5 years
Life Span	50,000 hours
Dimmable	0~10V dimmable
Item Weight	6.8 Kg (14.96 lbs)
Product Dimension	For 2'X4' troffer (533.4 x 1185 mm)
Pack Size	1pc
Packaging Dimension	48.4"L x 24.4"W x 3"H (1229.36 x 619.76 x 76.2 mm)



## Order Information


Item Number	Description	Power	Voltage Input	Dimmable	CCT	Lumen Output	Certificates
BL-TRF-24-52W-XTTD	2x4Ft LED Troffer Retrofit Kit	52W	120~277Vac	Optional	4000k 5000k	5460lm 6500lm	ETL/cETL, DLC

## Lux Chart

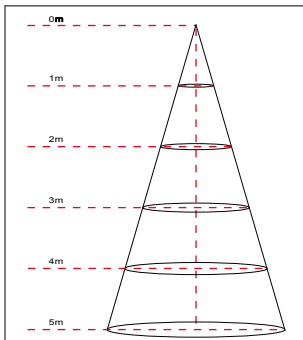

Height	Average Lux (lx)	Light range (dia.)
1M	304.6	332.2cm
2M	76.1	664.4cm
3M	33.9	996.6cm
4M	19.0	1328.8cm
5M	12.2	1660.99cm

## Photometrics

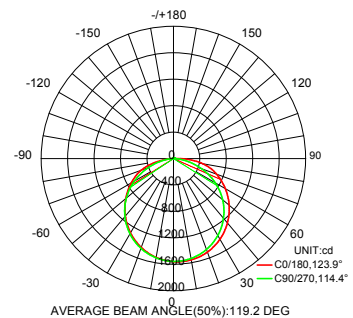


**LM79**  
**LM80**




Bravoled 2x4Ft LED Troffer Retrofit Kit, 52Watt 5460lm & 6500lm

## Dimensions and Pictures

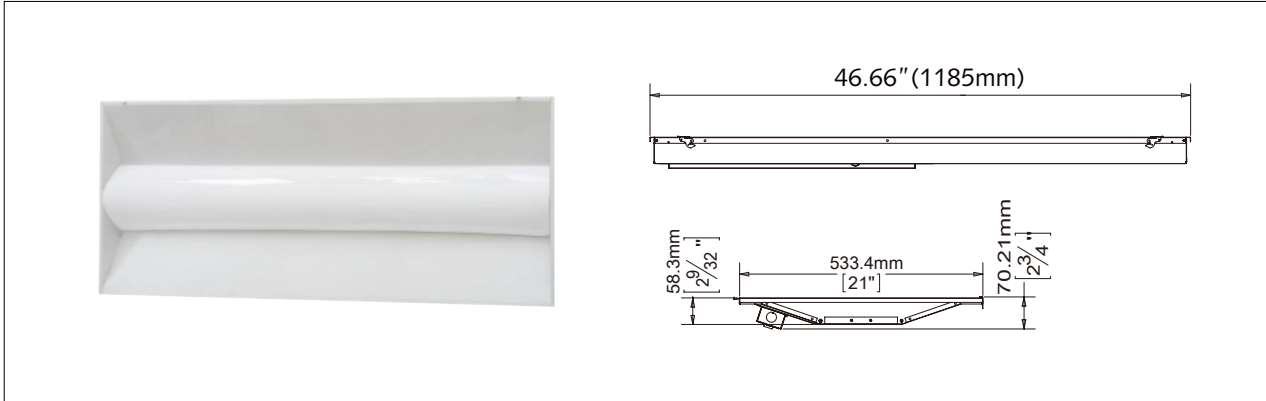

## Accessories (optional)

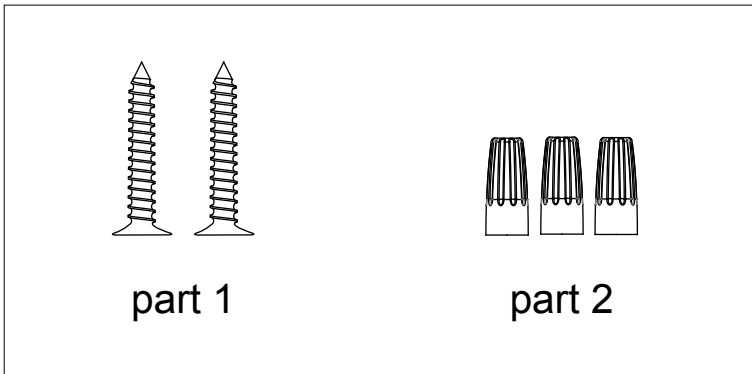

## Accessories package List

Part	Description	Quantity
1	self-tapped screw M4*30	2
2	Wire Nuts	*1or3

Note:

3 wire nuts for dimmable version, 1 wire nut for non-dimmable version.




**LM79**  
**LM80**




Bravoled 2x4Ft LED Troffer Retrofit Kit, 52Watt 5460lm & 6500lm

## Packaging


1pc/CTN G.W.: 9.36 kg Dimension: 48.4"L x 24.4"W x 3"H (1229.36 x 619.76 x 76.2 mm)

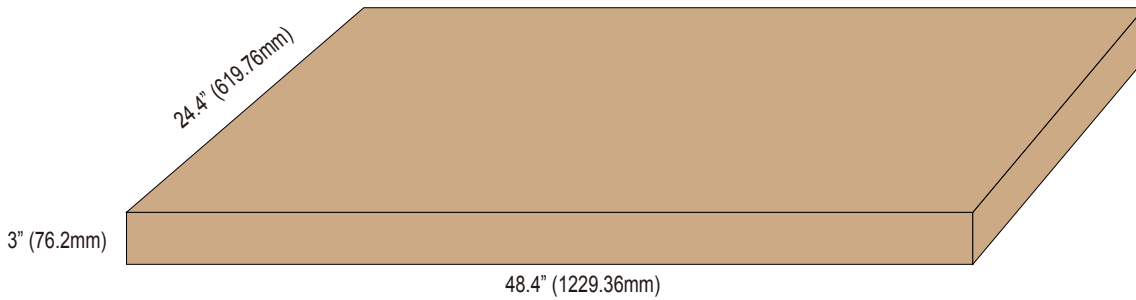


## Container Loading QTY

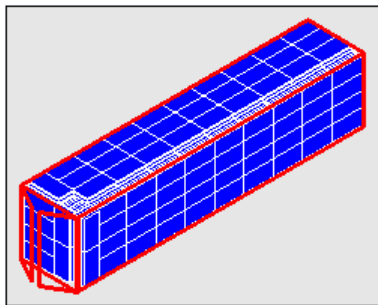

Size	Corton QTY	Product QTY	Volumn	G.W.
40'hq	1098 ctn	1098 pcs	72.91m <sup>3</sup>	10277.28kg

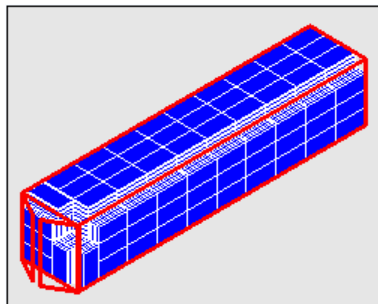

Size	Corton QTY	Product QTY	Volumn	G.W.
40'gp	941 ctn	941 pcs	62.48 m <sup>3</sup>	8807.76 kg

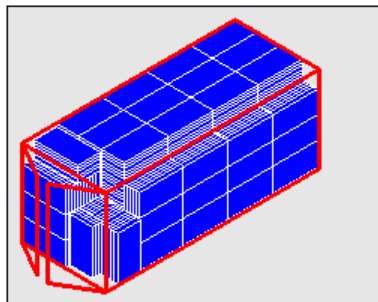

Size	Corton QTY	Product QTY	Volumn	G.W.
20'gp	450 ctn	450 pcs	29.88m <sup>3</sup>	4212kg



**LM79**  
**LM80**